

### Application :

- ☒ .Adopted to indoor distribution..
- ☒ .As pigtail of communication equipment.
- ☒ .Suitable for communication equipment served.
- ☒ .Can be installed conveniently and perated simply.


### Characteristics :

- ☒ .Hight strength kevlar yarn member.
- ☒ .High quality tight buffered or loose tube.
- ☒ .Soft and easy to strip.
- ☒ .Round construction.

### Technical Parameters:

Out sheath Diameter (MM)	Tight buffer Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength		minimum allowable Crush Load		Minimum Bending Radius		Storage temperatur (°C)
			short term	long term	short term	long term	short term	long term	
1.6×3.4	0,6	4,80	150	80	500	100	20D	10D	-20+60
1.8×3.8	0,6	5,00	150	80	500	100	20D	10D	-20+60
2.0×4.2	0,9	7,00	150	80	500	100	20D	10D	-20+60
2.4×5.0	0,9	9,00	150	80	500	100	20D	10D	-20+60
2.8×5.8	0,9	11,50	150	80	500	100	20D	10D	-20+60
3.0×6.2	0,9	12,50	150	80	500	100	20D	10D	-20+60

### Denominate:

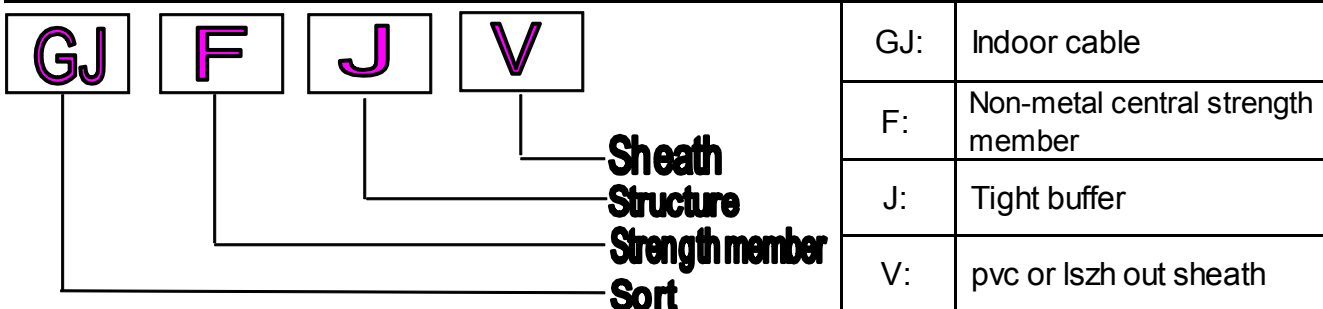

## Optical Characteristics

Fiber Sort	Multimode	G.651	A1a:50/125	Graded-index fiber
			A1b:62.5/125	
	Singlemode	G.652(A, B, C, D)		B1.1:Conventional fiber
		G.653		B2: Zero dispersion shifted
		G.654		B1.2 :Cut-off wavelength shifted
		G.655		B4: Main technical data for positive dispersion shifted single-mode fiber

